




NORTHCOTT
Cottons that feel like silk

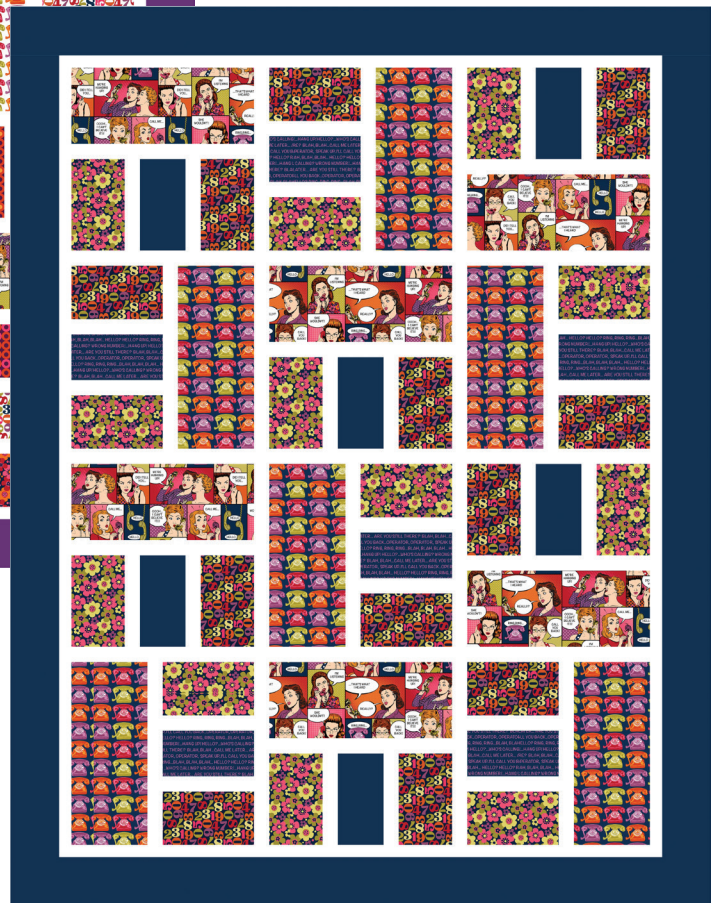

Call Me! Lap Quilt

FREE PATTERN • 66½" x 77" • By Northcott Studio

Northcott Canada
101 Courtland Avenue
Vaughan, Ontario L4K 3T5

Northcott USA
1050 Valley Brook Ave
Lyndhurst, NJ 07071

www.northcott.com

Call Me! Lap Quilt

Finished Size: 66½" by 77"

WOF = width of fabric

All seams are sewn using a ¼" seam allowance

Fabric requirements	Yards	Cutting Instructions
Fabric A - for Blocks 22477-49 (Navy & Purple Versions)	⅝ yard	<ul style="list-style-type: none"> • Cut three (3) – 6 ½" x WOF strips • Sub-cut six (6) – 6 ½" x 15 ½" rectangles
Fabric B - for Blocks 22478-49 or 22478-10 (Navy) (Purple)	½ yard	<ul style="list-style-type: none"> • Cut one (1) – 15 ½" x WOF strip • Sub-cut six (6) – 15 ½" x 6 ½" rectangles
Fabric C - for Blocks 22479-49 or 22479-10 (Navy) (Purple)	½ yard	<ul style="list-style-type: none"> • Cut three (3) – 4 ½" x WOF strips • Sub-cut twelve (12) – 4 ½" x 8" rectangles
Fabric D - for Blocks 22480-74 or 22480-54 (Navy) (Purple)	½ yard	<ul style="list-style-type: none"> • Cut three (3) – 4 ½" x WOF strips • Sub-cut twelve (12) – 4 ½" x 8" rectangles
Fabric E - for Blocks 22482-49 or 22483-84 (Navy) (Purple)	⅓ yard	<ul style="list-style-type: none"> • Cut two (2) – 4 ½" x WOF strips • Sub-cut six (6) – 4 ½" x 8" rectangles
Fabric F - for Blocks, Outer Border & Binding 9000-492 or 9000-84 (Navy) (Purple)	2 yards	<ul style="list-style-type: none"> • Cut two (2) – 4 ½" x WOF strips • Sub-cut six (6) – 4 ½" x 8" rectangles • Cut eight (8) – 5" x WOF strips • Sew 2 strips together end to end; trim to 68" for left side border • Sew 2 strips together end to end; trim to 68" for right side border • Sew 2 strips together end to end; trim to 60 ½" for top border • Sew 2 strips together end to end; trim to 60 ½" for bottom border • Cut eight (8) – 2 ½" x WOF strips; set aside for binding
Fabric G – for Sashing 9000-100 (Navy & Purple Versions)	1 ½ yards	<ul style="list-style-type: none"> • Cut twenty-six (26) – 2" x WOF strips • From five (5) strips, sub-cut 24 – 2" x 8" strips • From ten (10) strips, sub-cut 20 – 2" x 15 ½" strips • Sew four (4) strips together end to end; sub-cut 3 – 2" x 48 ½" strips • Sew two (2) strips together end to end; trim to 65" for left side border • Sew two (2) strips together end to end; trim to 65" for right side border • Sew three (3) strips together end to end; sub-cut 2 – 2" x 51 ½" top & bottom border strips
Crosswise Backing 22483-49 or 22483-84 (Navy) (Purple)	4 yards	<ul style="list-style-type: none"> • Cut in half lengthwise so you have two 2 yd x WOF pieces. Sew long edges together for a finished backing piece measuring approximately 72" x 84"

BLOCK 1 ASSEMBLY:

1. Sew a Fabric G 2" x 8" sashing strip to each long side of a Fabric F rectangle. Add a Fabric C rectangle to one side, and a Fabric D rectangle to the other side.
2. Sew a Fabric G 2" x 15 1/2" sashing strip to the top or bottom of a Fabric A rectangle, referring to the finished quilt image for placement in each block, and keeping in mind the direction of the Fabric A rectangle.
3. Join the pieced 8" x 15 1/2" rectangle assembled in step 1 to the 8" x 15 1/2" rectangle assembled in step 2 to complete Block 1. Make six (6).

BLOCK 2 ASSEMBLY:

1. Sew a Fabric G 2" x 8" sashing strip to each long side of a Fabric E rectangle. Referring to the finished quilt image and keeping in mind the direction of the Fabric E rectangle, add a Fabric C rectangle to one side, and a Fabric D rectangle to the other side.
2. Sew a Fabric G 2" x 15 1/2" sashing strip to the top or bottom of a Fabric B rectangle, referring to the finished quilt image for placement in each block, and keeping in mind the direction of the Fabric B rectangle.
3. Join the pieced 8" x 15 1/2" rectangle assembled in step 1 to the 8" x 15 1/2" rectangle assembled in step 2 to complete Block 2. Make six (6).

QUILT TOP ASSEMBLY:

1. Lay out the blocks for each row, alternating Block 1 & Block 2, making sure directional prints are correct. Add one strip of sashing (2" x 15 1/2") between the blocks to create four rows of three blocks each.
2. Sew a 2" x 48 1/2" sashing strip to the bottom edge of the first, second & third rows. Then join the four rows together, pressing all seams towards the sashing.
3. Measure the vertical length through the center of the quilt (it should be about 65" at this point). Match the center of the side sashing strips to the center of each side the quilt and pin. Match the ends of the sashing strips to both ends of the quilt and pin. Sew the seams and press towards the sashing. Repeat this process for the top and bottom sashing using the width through the center of the quilt as your measurement guide. Press towards the sashing.
4. Using the same method as above, attach the left & right side outer borders, then the top & bottom outer borders.
5. Layer quilt top with batting and backing. Quilt and bind as desired.