

Chevron Falls

FREE DOWNLOAD PATTERN

64" x 75"



Blue Pink



BANYAN
BATIKS
STUDIO

Designed by Banyan Batiks Studio
www.BanyanBatiks.com

Chevron Falls

64" x 75"

CONFIDENT BEGINNER LEVEL

Banyan Batiks Rough Sketch and Essentials fabric collections

	Fabric	YDS
Fabric A: <i>(units)</i>	80343-21	1 $\frac{5}{8}$
Fabric B: <i>(units & outer border)</i>	80344-45	2
Fabric C: <i>(units)</i>	80342-12	1 $\frac{1}{4}$
Fabric D: <i>(background)</i>	81000-910	$\frac{7}{8}$
Fabric E: <i>(Inner border & Binding)</i>	81000-490	1 $\frac{1}{4}$
Backing <i>(crosswise seam)</i>	4 $\frac{1}{8}$	

Other requirements:

72" x 86" batting and neutral-color thread for piecing

Chevron Falls

Approx. 64" x 75"


CUTTING INSTRUCTIONS

- WOF is width of fabric from selvage edge to selvage edge. Remove as little fabric as possible when trimming selvages and squaring strip ends.
- Use a 1/4" seam allowance for all piecing.


Fabric A	<ul style="list-style-type: none">• 6 strips 4 1/2" x WOF.• 1 strip 7 1/2" x WOF.• 5 strips 1 1/2" x WOF.• 3 strips 1 1/2" x WOF; Sub-cut into (1) 1 1/2" x 4 1/2" strip and (10) 1 1/2" x 8 1/2" strips.
Fabric B	<ul style="list-style-type: none">• 4 strips 4 1/2" x WOF.• 1 strip 7 1/2" x WOF.• 1 strip 7 1/2" x WOF; cut into (1) 4 1/2" x 7 1/2" rectangle. Cut remainder of strip into (3) 1 1/2" x 36" strips and Sub-cut cut into (9) 1 1/2" x 8 1/2" strips.• 7 strips 1 1/2" x WOF.• 7 strips 2 1/2" x WOF for outer border.
Fabric C	<ul style="list-style-type: none">• 10 strips 3 1/2" x WOF.
Fabric D	<ul style="list-style-type: none">• 2 strips 12 5/8" x WOF; Sub-cut cut into (4) 12 5/8" squares and (2) 12 1/4" squares. Cut the 12 5/8" squares twice diagonally to make 16 setting triangles. Cut the 12 1/4" squares in half diagonally to make 4 corner triangles.
Fabric E	<ul style="list-style-type: none">• 7 strips 2" x WOF for inner border.• 8 strips 2 1/4" x WOF for binding.
Backing Fabric	<ul style="list-style-type: none">• 2 strips 72" x WOF.

PIECING THE UNITS


1. Sew a 4 1/2" x WOF A strip lengthwise between a 3 1/2" x WOF C strip and a 1 1/2" x WOF B strip to make a strip set. Press seams away from the A strip. Repeat to make 6 strip sets. Crosscut the strip sets into (9) 11 1/2" x 8 1/2" Unit 1's and (9) 8 1/2" x 8 1/2" Unit 2's.

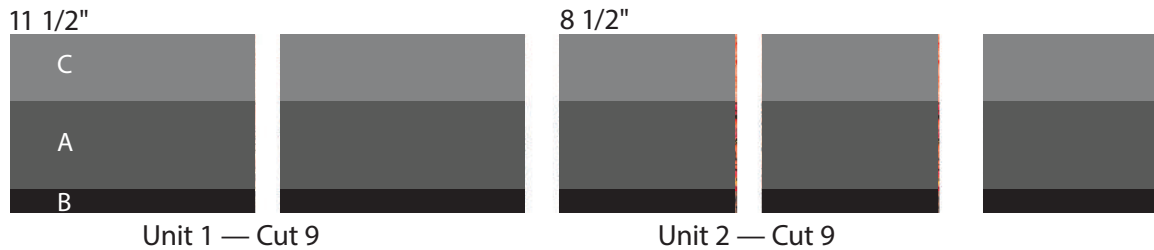


2. Sew the 7 1/2" x WOF A strip lengthwise together with a 1 1/2" x WOF B strip to make a strip set. Press seam toward the A strip. Crosscut the strip set into (9) 4 1/2" x 8 1/2" Segment 3's.

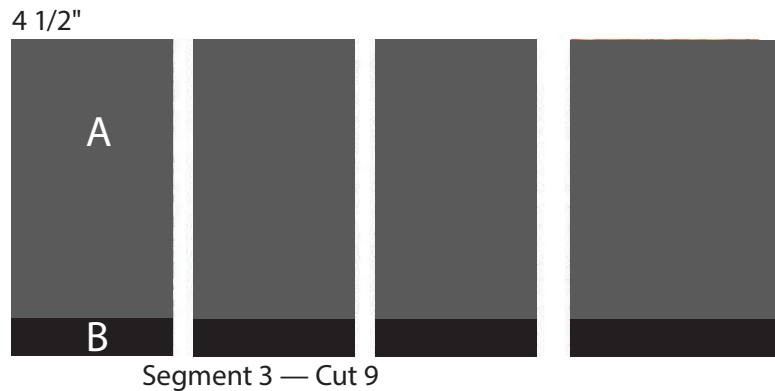

3. Sew a 1 1/2" x 8 1/2" B strip to one long side of each Segment 3 to make (9) 5 1/2" x 8 1/2" Unit 3's. Press seam away from the B strip.

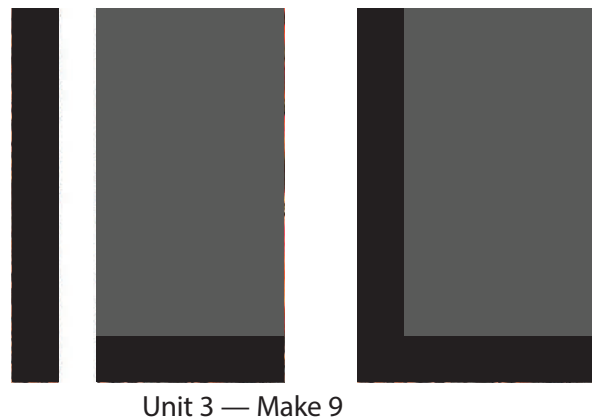


4. Sew a 4 1/2" x WOF B strip lengthwise between a 3 1/2" C strip and a 1 1/2" A strip to make a strip set. Press seams away from the B strip. Repeat to make four strip sets. Crosscut the strip sets into (6) 11 1/2" x 8 1/2" Unit 4's, (6) 8 1/2" x 8 1/2" Unit 5's and (4) 3 1/2" x 8 1/2" Unit 6's.

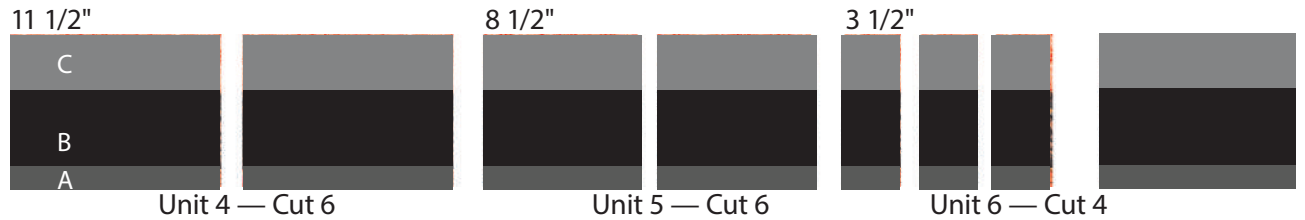

5. Sew the 7 1/2" x WOF B strip lengthwise together with a 1 1/2" x WOF A strip to make a strip set. Press seam toward the B strip. Crosscut the strip set into (9) 4 1/2" x 8 1/2" Segment 7's.



6. Sew the 1 1/2" x 4 1/2" A strip to one short end of the 4 1/2" x 7 1/2" B rectangle to make another Segment 7. Press seam toward the B rectangle. Sew a 1 1/2" x 8 1/2" A strip to one long side of each segment 7 to make (10) 5 1/2" x 8 1/2" Unit 7. Press seam away from the A strip.

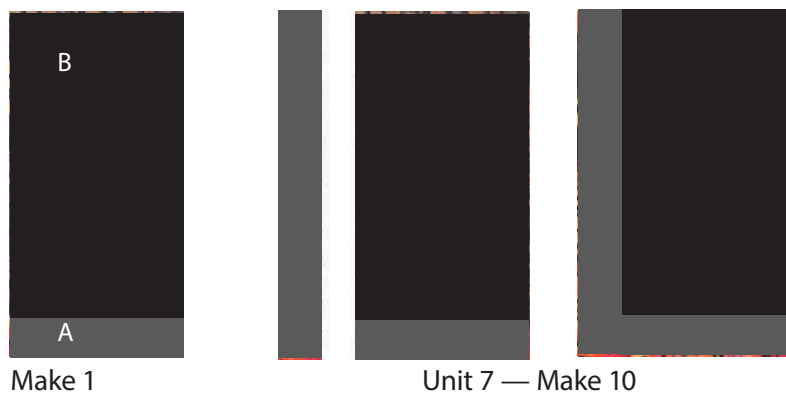

NOTE: Refer to the exploded quilt diagram below throughout the following steps.

COMPLETING THE QUILT

1. Arrange the Units and D setting triangles in nine diagonal rows. Join the units and triangles in each row. Press seams to the left in the odd rows and to the right in the even rows. Note: Units are labeled as U1, U2, etc., in the exploded diagram and rows are labeled as R1, R2, etc.
2. Join the rows. Press seams to one side. Add a D corner triangle to each angled edge to complete the 57 3/8" x 68 3/4" quilt center. Press seams toward the triangles. Note: Set aside the two remaining D setting triangles for another project.
3. Sew the 2" x WOF E strips short ends together to make a long strip. Press seams to one side. Cut into two each 68 3/4" and 60 3/8" strips. Stitch the longer strips to the long sides of the quilt center and the shorter strips to the top and bottom. Press seams toward the strips.
4. Repeat Step 3 with the 2 1/2" x WOF B strips to complete the top, cutting two each 71 3/4" and 64 3/8" strips.
5. Remove the selvage edges from the backing pieces. Sew together on the long edges with a 1/2" seam allowance. Press seam open. Trim to make the 72" x 83" backing piece with a horizontal seam.
6. Layer the top with the backing and batting pieces. Quilt as desired. Trim edges even with the top.
7. Prepare Fabric E binding and bind edges using your favorite method to complete the quilt.

EXPLODED QUILT DIAGRAM

