


STONEHENGE STARS & STRIPES II by Linda Ludovico & Deborah Edwards



PATTERNS BY PATTI CAREY



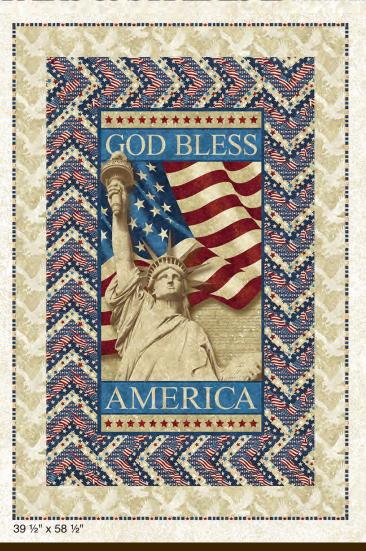

by Patti Carey

www.northcott.com

Braided Chevron

Braided Chevron Panel Quilt

Designed by Patti Carey using Northcott's Stonehenge Stars & Stripes and Undersea Adventures panels


Finished Size: approx. 40" x 59"

Wof = width of fabric

Fabric Requirements	Undersea	Stars &	Yards	Cutting Instructions
	Adventures	Stripes		
Center panel	39127-42	20157-49	⅔yd	♦ Trim panel ¼" beyond the inner border, or the part that
				you would like to see (approx. 40" x 20").
Braid fabric #1	39129-71	39104-49	³⁄₃yd	♦ Cut 5 strips 1½" x wof; cut into (30) 6¼" pieces.
				♦ Cut 5 strips 1½" x wof; cut into (30) 5¼" pieces.
Braid fabric #2	39132-71	20158-49	3∕syd	♦ Cut 5 strips 1½" x wof; cut into (30) 6¼" pieces.
				♦ Cut 5 strips 1½" x wof; cut into (30) 5¼" pieces.
Braid fabric #3	39131-59	39101-49	3∕syd	♦ Cut 5 strips 1½" x wof; cut into (30) 6¼" pieces.
				♦ Cut 5 strips 1½" x wof; cut into (30) 5¼" pieces.
Braid fabric #4	39120-59	20159-30	3∕syd	♦ Cut 5 strips 1½" x wof; cut into (30) 6¼" pieces.
				♦ Cut 5 strips 1½" x wof; cut into (30) 5¼" pieces.
Outer border	39128-42	39103-30	⅔yd	♦ Cut 5 strips 4¼" x wof and join end-to-end.
Binding	39131-59	20161-49	3∕syd	♦ Cut 5 strips 2¼" x wof.; join end-to-end and press in half.
Backing	2yds	•	•	
Batting	A piece approx. 43" x 62" or 3" bigger than the quilt top			

Piecing:

- **1.** Place a 6¼" Braid fabric #1 strip on a 5¼" Braid #1 strip as shown. Stitch and finger press seam toward 2nd strip.
- **2.** Lay a $5\frac{1}{4}$ " Braid fabric #2 strip on the first strip, aligning end at outer edge of 2^{nd} strip above. Stitch, and finger press toward Braid #2 strip.



- **3.** Add a 6¼" Braid #2 strip, aligning it with Braid #1 2nd strip; finger press seam toward Braid #2 2nd strip.
- **4.** Continue adding strips in pairs (Braid #3, Braid #4, Braid #1, Braid #2, etc.) to form a chevron until braid measures 165". Carefully trim braid to 6½" wide.

Assembly:

- 1. Cut 2 braid pieces the length of the panel plus 6", and 2 pieces the width of the panel plus 6".
- **2.** Lay a shorter braid piece along top edge of panel, having the top right corners aligned. Sew a partial seam by sewing only 8" of the braid to the top edge of the panel. Finger-press seam toward panel.
- **3.** Sew a longer braid piece to the right edge of the panel, finger-pressing seam toward panel.
- **4.** Sew a shorter braid piece to bottom edge, then a longer braid piece to left edge of panel.
- **5.** Finish sewing the top border to the top edge.
- **6.** Measure the length of the quilt, and cut 2 strips this length from the outer border fabric; add to sides of quilt and press seam toward outer border.
- **7.** Measure the width of the quilt including this border, and cut 2 strips this length from the outer border fabric; add to top and bottom edges, pressing seam toward outer border.

Finishing:

Layer the backing, batting and quilt top; baste and quilt as desired. Trim edges even with quilt top. Sew the prepared binding to the edges, turn and stitch in place.