


French Macaroon

FREE DOWNLOAD PATTERN

40" x 45"

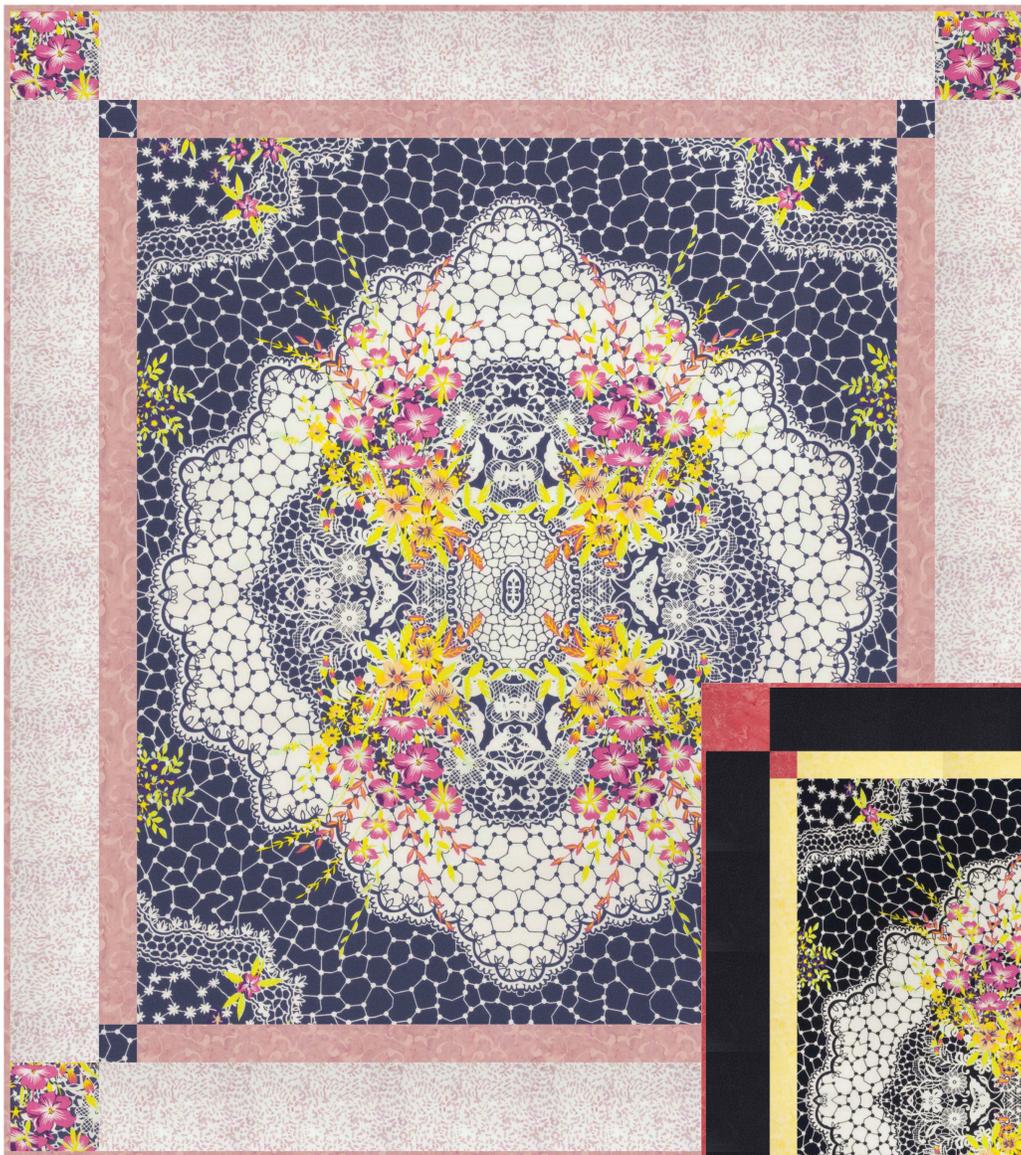

Designed by Banyan Batiks Studio
www.BanyanBatiks.com

French Macaroon Panel Quilt

Finished Size: 40" x 45"

WOF = width of fabric

All seams are sewn using a ¼" seam allowance

Fabric requirements for Navy Version	Yardage	Cutting Instructions
Fabric A – Center Panel 80120-49	7/8 yard	<ul style="list-style-type: none"> Trim Panel to 35 ½" (width) x 30 ½" (length); <i>Do not discard trimmed pieces – they will be used for cornerstones.</i> NOTE: Once trimmed, panel is then turned 45° so that the length is 35 ½" and the width is 30 ½"
Fabric B - Inner Border & Binding 80123-80	3/4 yard	<ul style="list-style-type: none"> Cut four (4) – 2" x WOF strips Cut five (5) – 2 ¼" x WOF strips; set aside for binding
Fabric C – Outer Border 81000-200	1/2 yard	<ul style="list-style-type: none"> Cut four (4) – 4" x WOF strips
Fabric D – Cornerstones Fussy Cut from Remaining Panel	-----	<ul style="list-style-type: none"> Referring to the quilt image, fussy cut four (4) – 2" squares and four (4) – 4" squares
Backing 80124-49	1 1/2 yards	<ul style="list-style-type: none"> No cutting required

Fabric requirements for Black Version	Yardage	Cutting Instructions
Fabric A – Center Panel 80120-99	7/8 yard	<ul style="list-style-type: none"> Trim Panel to 35 ½" (width) x 30 ½" (length) NOTE: Once trimmed, panel is then turned 45° so that the length is 35 ½" and the width is 30 ½"
Fabric B - Inner Border 81300-50	1/4 yard	<ul style="list-style-type: none"> Cut four (4) – 2" x WOF strips
Fabric C – Outer Border 81000-998	1/2 yard	<ul style="list-style-type: none"> Cut four (4) – 4" x WOF strips
Fabric D – Cornerstones & Binding 81300-22	1/2 yard	<ul style="list-style-type: none"> Cut one (1) – 4" x WOF strip Sub-cut four (4) – 4" squares and four (4) – 2" squares Cut five (5) – 2 ¼" x WOF strips; set aside for binding
Backing 80124-21	1 1/2 yards	<ul style="list-style-type: none"> No cutting required

QUILT TOP ASSEMBLY:

1. Trim two inner border strips to 35 ½" and sew one to each side of center panel. Press seams toward the center.
2. Trim two inner border strips to 30 ½". Sew a 2" x 2" cornerstone to each end of both strips. Press seams toward the cornerstones. Then sew these strips to the top & bottom of the center panel, pressing the seams toward the center.
3. Repeat Step 1 to attach the side outer borders, measuring the length of the quilt through the center to determine what length to trim the side outer border strips.
4. Repeat Step 2 to attach the top & bottom outer borders, measuring the width of the quilt through the center to determine what length to trim the outer border strips, and sewing the 4" x 4" cornerstones to each end of the top & bottom outer border strips.
5. Join the binding strips end to end using diagonal seams.
6. Layer quilt top with batting and backing. Quilt and bind as desired.