


STONEHENGE
by Linda Ludovico


Gradations

REGISTERED
R

FREE DOWNLOAD PATTERNS

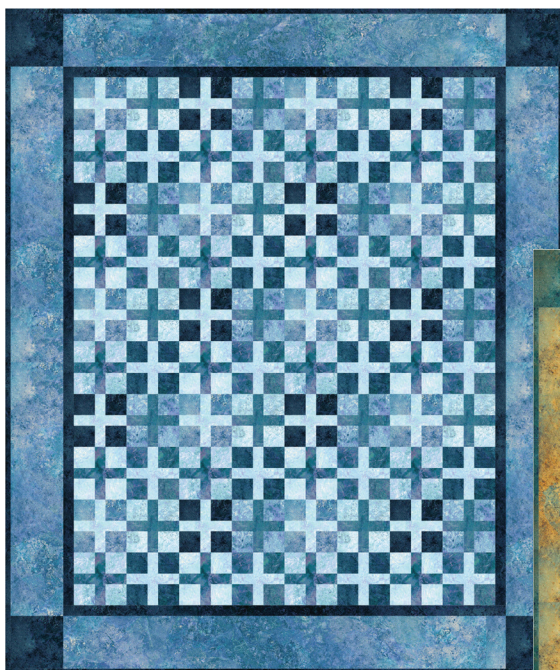

Gradations
Midnight

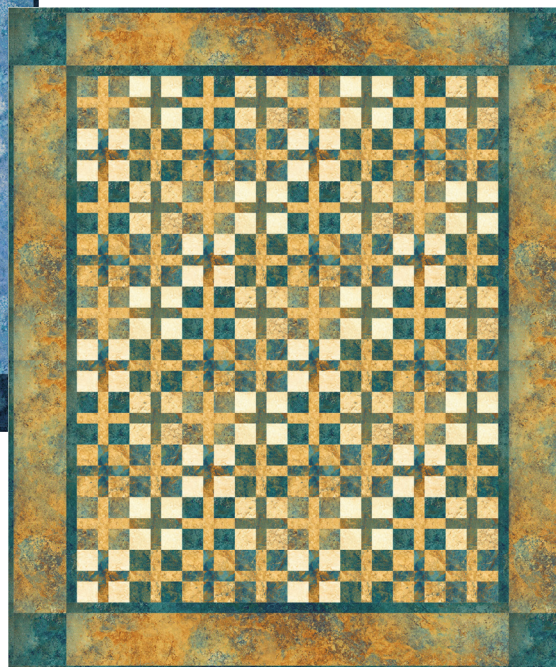

Gradations Oxidized Copper

HOPSCOTCH

FREE PATTERN • By Northcott Studio

Finished Sizes approx. 52" x 62"

Northcott Canada
101 Courtland Avenue
Vaughan, Ontario L4K 3T5

Northcott USA
1050 Valley Brook Ave,
Lyndhurst, NJ 07071

www.northcott.com

HOPSCOTCH

Collection: **Stonehenge Gradations**











Finished Size: 52" x 62"

WOF = width of fabric

All seams are sewn using a ¼" seam allowance



Skill Level: Beginner

Requirements:

Oxidized Copper	Midnight	Yardage	Cutting Instructions
CSTONE42-69	CSTONE42-46	2 Chip Packs (84 – 5" squares)	See Block Assembly Instructions below.
Fabric A 39302-69 	Fabric A 39302-47 	1/2 yd	Cut 10 – 1 ½" x WOF strips (for Block Sashing) ➤ From each strip, sub-cut: 4 – 1 ½" x 5" strips and 4 - 1 ½" x 5 ½" strips for a total of 40 of each size.
Fabric B 39303-68 	Fabric B 39303-46 	1/2 yd	Cut 10 – 1 ½" x WOF strips (for Block Sashing) ➤ From each strip, sub-cut: 4 – 1 ½" x 5" strips and 4 - 1 ½" x 5 ½" strips for a total of 40 of each size.
Fabric C 39300-69 	Fabric C 39300-47 	7/8 yd	Cut 5 – 1 ½" x WOF strips (for Inner Border) Cut 1 – 5 ½" x WOF strip (for Cornerstones) Cut 5 – 2 ½" x WOF strips (for Binding)
Fabric D 39300-68 	Fabric D 39300-46 	7/8 yd	Cut 5 – 5 ½" x WOF strips (for Outer Border)
Crosswise Backing 39382-66 	Crosswise Backing 39303-46 	4 yds	Cut fabric in half along length of fabric. Join the 2 – 72" x WOF pieces along the selvage edges.

Block Assembly:

NOTE: 80 of the 5" squares will be used. There will be 4 squares left over.

1. Choose a set of Fabric A & B sashing strips to coordinate with each 5" square. (Pair lighter strips with darker squares and darker strips with lighter squares.)
2. Cut 80 – 5" squares in half. Sew a 1 ½" x 5" sashing strip between the two halves of the square. 
3. Cut the block in half vertically and sew a 1 ½" x 5 ½" sashing strip between the two halves to complete the block. 
4. Repeat with the remaining squares & sashing strips to make 80 blocks.

Quilt Top Assembly:

1. Arrange blocks into 10 rows of 8, alternating between light square/dark sashing blocks and dark square/light sashing blocks.
2. Sew blocks together into rows, pressing seams to the left on row 1, to the right on row 2, etc. so that seams will nest when the rows are sewn together. Sew rows together.
3. Join the Fabric C Inner Border strips end to end. Cut 2 – 1 ½" x 50 ½" strips and sew to each side of the quilt top. Then cut 2 – 1 ½" x 42 ½" strips and sew to top and bottom of the quilt top.
4. From the Fabric C 5 ½" x WOF strip, cut 4 – 5 ½" squares (cornerstones).
5. Join the Fabric D Outer Border strips end to end. Cut 2 – 5 ½" x 52 ½" strips and sew to each side of the quilt top.
6. Then cut 2 – 5 ½" x 42 ½" strips. Sew a Fabric C cornerstone to each end of these strips. Then sew the strips to the top and bottom of the quilt top.

Finishing the Quilt:

1. Join the Fabric C binding strips using diagonal seams. Fold in half wrong sides together along the length of the strip and press.
2. Layer quilt top with batting and prepared backing. Quilt as desired.
3. Bind quilt using your favorite method.