

Jack-O-Lustre

FREE DOWNLOAD PATTERN

48" x 64"



Designed by Banyan Batiks Studio
www.BanyanBatiks.com







Jack-O-Lustre Lap Quilt

Collections: Lustre & Shadows

Finished Size: 48" x 64"


WOF = Width of Fabric

All seams are sewn using a ¼" seam allowance


Requirement	Yardage	Cutting Instructions
 Fabric A - 81221-59 (Lustre)	1 1/2 yds	Cut 8 – 4 ½" x WOF strips <ul style="list-style-type: none"> Sub-cut 72 – 4 ½" squares Cut 1 – 2 ½" x WOF strip Cut 6 – 2 ¼" x WOF strips (set aside for binding)
 Fabric B - 81221-53 (Lustre)	1/3 yd	Cut 2 – 2 ½" x WOF strips <ul style="list-style-type: none"> Sub-cut 27 – 2 ½" squares Cut 2 – 3" x WOF strips <ul style="list-style-type: none"> Sub-cut 18 – 3" squares & 9 – 1 ½" x 1 ½" squares
 Fabric C - 81221-73 (Lustre)	1/3 yd	Cut 2 – 2 ½" x WOF strips <ul style="list-style-type: none"> Sub-cut 27 – 2 ½" squares Cut 2 – 3" x WOF strips <ul style="list-style-type: none"> Sub-cut 18 – 3" squares
 Fabric D - 81300-52 (Shadows)	1/3 yd	Cut 4 – 2 ½" x WOF strips <ul style="list-style-type: none"> Sub-cut 36 – 2 ½" squares (leave one strip full WOF)
 Fabric E - 81300-99 (Shadows)	1 3/4 yd	Cut 3 – 3" x WOF strips <ul style="list-style-type: none"> Sub-cut 36 – 3" squares Cut 5 – 2 ½" x WOF strips <ul style="list-style-type: none"> Sub-cut 72 – 2 ½" squares Cut 6 – 1 ½" x WOF strips <ul style="list-style-type: none"> Sub-cut 9 – 1 ½" x 12 ½" strips & 18 – 1 ½" x 6" strips Cut 6 – 3 ½" x WOF strips (for vertical sashing) Cut 3 – 2 ½" x WOF strips (for top & bottom borders)
 81221-53 (Lustre) Crosswise Backing	3 yds	Cut length of fabric in half to yield 2 – 54" x WOF pieces. Sew the two pieces together along the selvage edges.

Block Assembly: **NOTE: Watch for right/wrong side of Lustre. The metallic finish is on one side only.**


1. With right sides together, sew a Fabric A 2 ½" x WOF strip to a Fabric D 2 ½" x WOF strip along the long edges. Sub-cut the strip into 9 – 4 ½" squares as shown (one unit for each block).




2. Using a 4 ½" Fabric A square, a 2 ½" Fabric D square and a 2 ½" Fabric E square, place the Fabric D square in one top corner of the Fabric A square. Draw a diagonal line from corner to corner. Sew along the drawn line and cut off excess fabric ¼" above the seam line. Press seam open. Repeat this process with the Fabric E square in the opposite bottom corner to complete the unit as shown below. Make 36 (4 units for each block).




3. Take a $1\frac{1}{2}$ " x $1\frac{1}{2}$ " Fabric B rectangle and sew a $1\frac{1}{2}$ " x 6" Fabric E strip to each side as shown below. Make 9 (1 unit for each block).




4. Arrange your units, along with 4 – $4\frac{1}{2}$ " Fabric A squares as shown below. Sew blocks together into rows, pressing seams in the opposite direction on every other row so they will nest when sewing the rows together. Then sew the strip unit made in Step 3 to the top. This completes Part A of Block 1. Make 9.

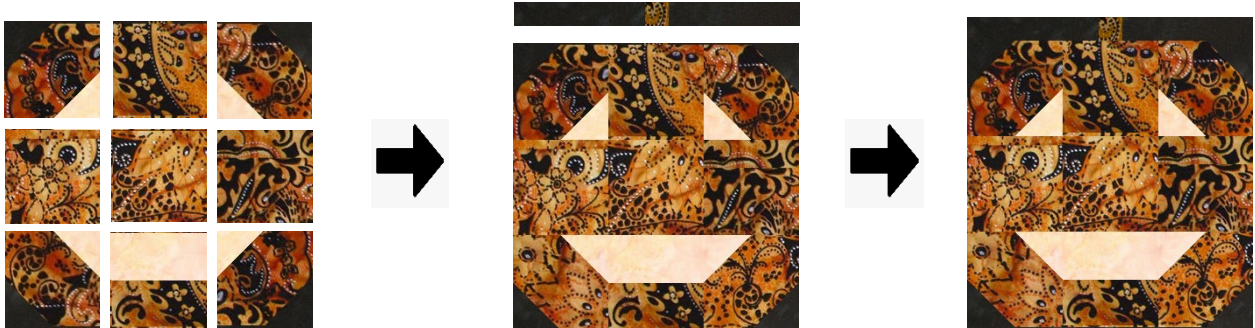


5. Referring to the diagram below, take one 3" Fabric B square & one 3" Fabric E square. Place squares right sides together and draw a diagonal line on the wrong side of one of the squares. Pin together. Sew a scant $\frac{1}{4}$ " away from both sides of the drawn line. Cut apart on the drawn line to yield two half square triangle units. Press seam toward the darker fabric. Repeat this process to yield 36 B-E HST units (4 units for each block). Trim all HST units to $2\frac{1}{2}$ ".

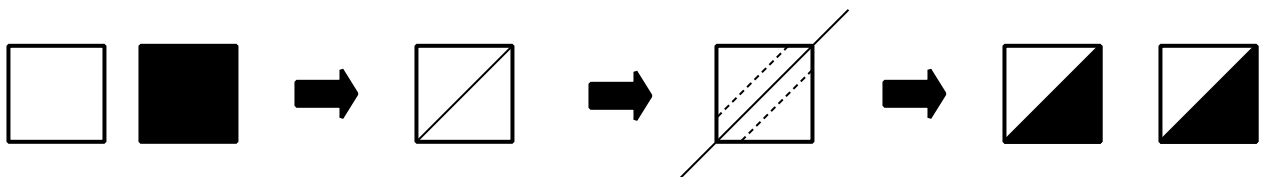

6. Repeat Step 5 using 3" Fabric C squares & 3" Fabric E squares to yield 36 C-E HST units (4 units for each block). Trim all HST units to $2\frac{1}{2}$ ".
7. Arrange your HST units, along with 3 – $2\frac{1}{2}$ " Fabric B squares, 3 – $2\frac{1}{2}$ " Fabric C squares and four $2\frac{1}{2}$ " Fabric E squares as shown below. Sew blocks together into rows, pressing seams in the opposite direction on every other row so they will nest when sewing the rows together. Then sew a $1\frac{1}{2}$ " x $12\frac{1}{2}$ " Fabric E strip to the top. This completes Part B of Block 1. Make 9, switching the position and/or direction of the leaf units as desired. (Refer to exploded diagram on the next page.)

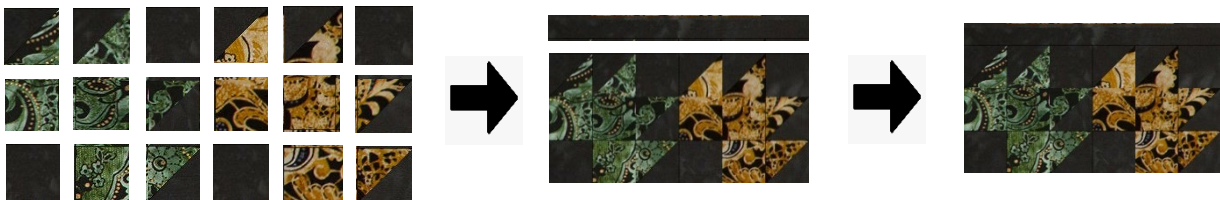

8. Sew Part A & Part B together to complete Block 1 as shown. Make six Block 1's, arranging the leaf units as desired. (See exploded diagram on next page.)

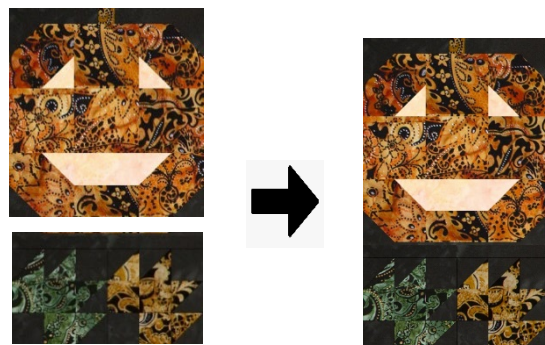

Block 2 Assembly:

Repeat the steps for Block 1 to complete Block 2, placing Part B on the top and Part A on the bottom as shown.

Make three Block 2's, arranging the leaf units as desired. (See exploded diagram below.)



Quilt Top Assembly:

Sew Block 1's together in two vertical rows of three, and Block 2's together in one vertical row of three as shown below.

Join the six Fabric E 3 ½" x WOF vertical sashing strips together on the short ends. Cut four 60 ½" x 3 ½" strips.

Sew vertical rows together with a sashing strip between each row, starting & ending with a sashing strip, as shown.

Join the three Fabric E 2 ½" x WOF border strips together on the short ends. Cut two 48 ½" x 2 ½" top & bottom border strips. Add these strips to the top & bottom of the quilt top, as shown.



Layer quilt top with batting & backing. Quilt as desired.

Join Fabric A binding strips end-to-end with diagonal seams and press in half lengthwise. Bind using your favorite method.