

# Jack-O-Lustre Runner

FREE DOWNLOAD PATTERN

48" x 24"



Designed by Banyan Batiks Studio  
[www.BanyanBatiks.com](http://www.BanyanBatiks.com)







## Jack-O-Lustre Runner

**Collections:** Lustre & Shadows

**Finished Size:** 48" x 24"


**WOF** = Width of Fabric

All seams are sewn using a ¼" seam allowance


Requirement	Yardage	Cutting Instructions
 Fabric A - 81221-59 (Lustre)	3/4 yd	Cut 3 – 4 ½" x WOF strips <ul style="list-style-type: none"> <li>Sub-cut 24 – 4 ½" squares</li> </ul> Cut 1 – 2 ½" x WOF strip Cut 4 – 2 ¼" x WOF strips (set aside for binding)
 Fabric B - 81221-53 (Lustre)	1/4 yd	Cut 1 – 2 ½" x WOF strip <ul style="list-style-type: none"> <li>Sub-cut 9 – 2 ½" squares</li> </ul> Cut 1 – 3" x WOF strip <ul style="list-style-type: none"> <li>Sub-cut 6 – 3" squares &amp; 3 – 1 ½" x 1 ½" rectangles</li> </ul>
 Fabric C - 81221-73 (Lustre)	1/4 yd	Cut 1 – 2 ½" x WOF strip <ul style="list-style-type: none"> <li>Sub-cut 9 – 2 ½" squares</li> </ul> Cut 1 – 3" x WOF strip <ul style="list-style-type: none"> <li>Sub-cut 6 – 3" squares</li> </ul>
 Fabric D - 81300-52 (Shadows)	1/4 yd	Cut 2 – 2 ½" x WOF strips <ul style="list-style-type: none"> <li>Sub-cut 12 – 2 ½" squares (leave one strip full WOF)</li> </ul>
 Fabric E - 81300-99 (Shadows)	3/4 yd	Cut 1 – 3" x WOF strip <ul style="list-style-type: none"> <li>Sub-cut 12 – 3" squares</li> </ul> Cut 2 – 2 ½" x WOF strips <ul style="list-style-type: none"> <li>Sub-cut 24 – 2 ½" squares</li> </ul> Cut 2 – 1 ½" x WOF strips <ul style="list-style-type: none"> <li>Sub-cut 3 – 1 ½" x 12 ½" strips &amp; 6 – 1 ½" x 6" strips</li> </ul> Cut 2 – 3 ½" x WOF strips (for vertical sashing) <ul style="list-style-type: none"> <li>Sub-cut 4 – 3 ½" x 20 ½" strips</li> </ul> Cut 3 – 2 ½" x WOF strips (for top & bottom borders)
 81221-53 (Lustre) Crosswise Backing	1 yd	Cut width of fabric in half to yield 2 – 22" x 36" pieces. Sew the two pieces together along the short edges.

**Block Assembly: \*\*NOTE: Watch for right/wrong side of Lustre. The metallic finish is on one side only.\*\***

1. With right sides together, sew a Fabric A 2 ½" x WOF strip to a Fabric D 2 ½" x WOF strip along the long edges. Sub-cut the strip into 3 – 4 ½" squares as shown (1 unit for each block).



2. Using a 4 ½" Fabric A square, a 2 ½" Fabric D square and a 2 ½" Fabric E square, place the Fabric D square in one top corner of the Fabric A square. Draw a diagonal line from corner to corner. Sew along the drawn line and cut off excess fabric ¼" above the seam line. Press seam open. Repeat this process with the Fabric E square in the opposite bottom corner to complete the unit as shown below. Make 12 (4 units for each block).




- Take 1 – 1 1/2" x 1 1/2" Fabric B rectangle and sew a 1 1/2" x 6" Fabric E strip to each side as shown below. Make 3 (1 unit for each block).



- Arrange your units, along with 4 – 4 1/2" Fabric A squares as shown below. Sew blocks together into rows, pressing seams in the opposite direction on every other row so they will nest when sewing the rows together. Then sew the strip unit made in Step 3 to the top. This completes Part A of Block 1. Make 3.




- Referring to the diagram below, take one 3" Fabric B square & one 3" Fabric E square. Place squares right sides together and draw a diagonal line on the wrong side of one of the squares. Pin together. Sew a scant 1/4" away from both sides of the drawn line. Cut apart on the drawn line to yield two half square triangle units. Press open. Repeat this process to yield 12 B-E HST units (4 units for each block). Trim all HST units to 2 1/2".

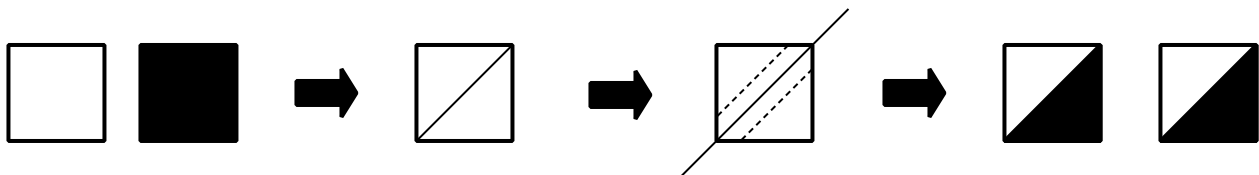

- Repeat Step 5 using 3" Fabric C squares & 3" Fabric E squares to yield 12 C-E HST units (4 units for each block). Trim all HST units to 2 1/2".

- Arrange your HST units, along with 3 – 2 1/2" Fabric B squares, 3 – 2 1/2" Fabric C squares and four 2 1/2" Fabric E squares as shown below. Sew blocks together into rows, pressing seams in the opposite direction on every other row so they will nest when sewing the rows together. Then sew a 1 1/2" x 12 1/2" Fabric E strip to the top. This completes Part B of Block 1. Make 3, switching the position and/or direction of the leaf units as desired. (Refer to exploded diagram on next page.)

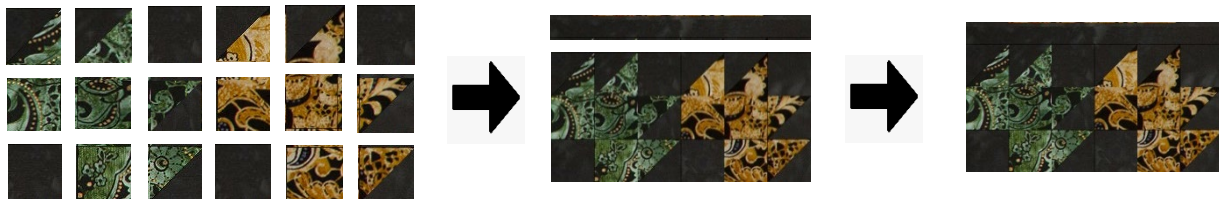

- Sew Part A & Part B together to complete Block 1 as shown.

Make two Block 1's, switching the position and/or direction of the leaf units (Part B) as desired. (See exploded diagram on next page.)





Repeat these steps to complete Block 2, placing Part B on the top and Part A on the bottom as shown.

Make one Block 2, switching the position and/or direction of the leaf units (Part B) as desired. (See exploded diagram below.)



### Quilt Top Assembly:

Sew blocks together (Block 1; Block 2; Block 1) with a sashing strip between each row, starting & ending with a sashing strip, as shown.

Join the three Fabric E  $2\frac{1}{2}$ " x WOF border strips together on the short ends. Cut two  $48\frac{1}{2}$ " x  $2\frac{1}{2}$ " top & bottom border strips. Add these strips to the top & bottom of the quilt top, as shown.



Layer quilt top with batting & backing. Quilt as desired.

Join Fabric A binding strips end-to-end with diagonal seams and press in half lengthwise. Bind using your favorite method.