
Lustrous Wreaths

FREE DOWNLOAD PATTERN

55" x 66"



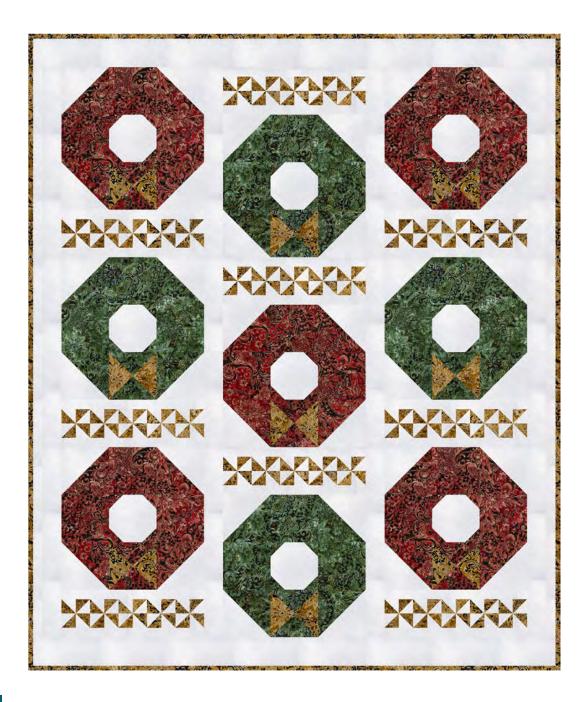

Lustrous Wreaths

Collections: Lustre & Banyan Classics


Finished Size: 55" x 66" WOF = Width of Fabric

All seams are sewn using a 1/2" seam allowance


Requirement		Yardage	Cutting Instructions
	Fabric A -		Cut 2 – 5 ½" x WOF strips
	81221-22	1 yd	• Sub-cut 15 – 5 ½" squares
	(Lustre)		Cut 2 – 6" x WOF strips
			Sub-cut 10 – 6" squares
			Cut 1 – 2" x WOF strip
			Sub-cut 20 – 2" squares
			Cut 1 – 6 ½" x WOF strip
			• Sub-cut 3 – 6 ½" squares
	Fabric B -		Cut 2 – 5 ½" x WOF strips
	81221-73	7/8 yd	• Sub-cut 12 – 5 ½" squares
	(Lustre)		Cut 2 – 6" x WOF strips
			• Sub-cut 8 – 6" squares
			Cut 1 – 2" x WOF strip
			• Sub-cut 16 – 2" squares
			Cut 1 – 6 ½" x WOF strip
			• Sub-cut 2 – 6 ½" squares
	Fabric C -		Cut 2 – 6 ½" x WOF strips
	81221-53	1 3/8 yds	• Sub-cut 5 – 6 ½" squares
	(Lustre)		Cut 6 – 2 ½" x WOF strips
			• Sub-cut 90 – 2 ½" squares
			Cut 7 – 2 ¼" x WOF strips (set aside for binding)
	Fabric D -		Cut 2 – 5 ½" x WOF strips
	81205-10	2 1/2 yds	• Sub-cut 9 – 5 ½" squares
	(Banyan Classics)		Cut 3 – 6" x WOF strips
			• Sub-cut 18 – 6" squares
			Cut 9 – 1 ½" x WOF strips
			• Sub-cut 18 – 1 ½" x 15 ½" strips
			Cut 10 – 2 ½" x WOF strips
			• Sub-cut 90 – 2 ½" squares
			 Leave remaining 4 – 2 ½" strips full width of fabric
			Cut 7 – 3 ½" x WOF strips (for outer border)
	Crosswise Backing	3 1/2 yds	Cut length of fabric in half to yield 2 – 63" x WOF pieces.
	81221-73		Sew the two pieces together along the selvage edges.
	(Lustre)		

Block 1 Assembly: **NOTE: Watch for right/wrong side of Lustre. The metallic finish is on one side only.**


1. Take one 6" Fabric A square & one 6" Fabric D square. Place squares right sides together and draw a diagonal line on the wrong side of the Fabric D square. Pin together. Sew a scant ¼" away from both sides of the drawn line. Cut apart on the drawn line to yield two half square triangle units. Press toward the darker fabric. Repeat this process to yield 20 A-D HST units (4 units for each block). Trim these HST Units to 5 ½".




2. Take one 5 $\frac{1}{2}$ " Fabric D square and 4 – 2" Fabric A squares. Draw a diagonal line from corner to corner on the wrong side each Fabric A square. Place a Fabric A square in each corner of the Fabric D square. Sew along the drawn lines and cut off excess fabric $\frac{1}{2}$ " above the seam line. Press seams open. Make 5 Snowball Units.



3. Layer a 6" Fabric A square and a 6" Fabric C square with right sides together. Pin in place. Draw a diagonal line from corner to corner and stitch ¼" away from the drawn line on both sides. Cut the stitched unit apart on the drawn line. Press the units open toward the darker fabric. Draw a diagonal line perpendicular with the sewn seam on one of the units. With right sides together, layer the two sewn units. Nest the seam allowances and pin in place. Stitch ¼" away from both sides of the drawn line. Cut the unit apart on the drawn line and press open. Make 5 Hourglass Units.



4. Arrange your units, along with 3-5 %" Fabric A squares as shown below. Sew blocks together into rows, pressing seams in the opposite direction on every other row so they will nest when sewing the rows together. This completes Part A of Block 1. Make 5.

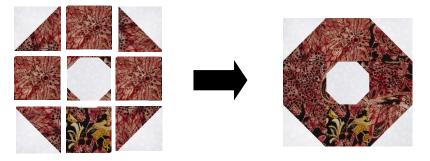

- 5. Repeat Steps 1 to 4 using Fabric B in place of Fabric A to complete Part A of Block 2. Make 4.
- 6. Using the Fabric C & D 2 ½" squares, make HST units following Step 1 instructions & diagram. Repeat to yield 180 C-D HST Units (20 units for each block). Trim these HST Units to 2".

7. Sew HST Units together in blocks of four to create Pinwheel Units as shown.



8. Sew five Pinwheel Units together and add a Fabric D 1 ½" x 15 ½" strip to the top & bottom. This completes Part B of Block 1 & 2.



9. Add Part B to Part A of the blocks, noting placement of Part B (top or bottom) for each block as follows:



Quilt Top Assembly:

Sew blocks together in three vertical rows of three as shown below.

Join the four Fabric D 2 $\frac{1}{2}$ " x WOF vertical sashing strips together on the short ends in sets of two. Trim each long strip to 60 $\frac{1}{2}$ " x 2 $\frac{1}{2}$ ". Sew vertical rows together with a sashing strip between each row as shown below.

Join the seven Fabric D 3 $\frac{1}{2}$ " x WOF border strips together on the short ends. Cut two 60 $\frac{1}{2}$ " x 3 $\frac{1}{2}$ " side border strips. Add these strips to the sides of the quilt top as shown. Cut two 55 $\frac{1}{2}$ " x 3 $\frac{1}{2}$ " top & bottom border strips. Add these strips to the top & bottom of the quilt top as shown.



Layer quilt top with batting & backing. Quilt as desired.

Join Fabric C binding strips end-to-end with diagonal seams and press in half lengthwise. Bind using your favorite method.