


Muse

by Kimberly Anderson



NORTHCOTT
Cottons that feel like silk

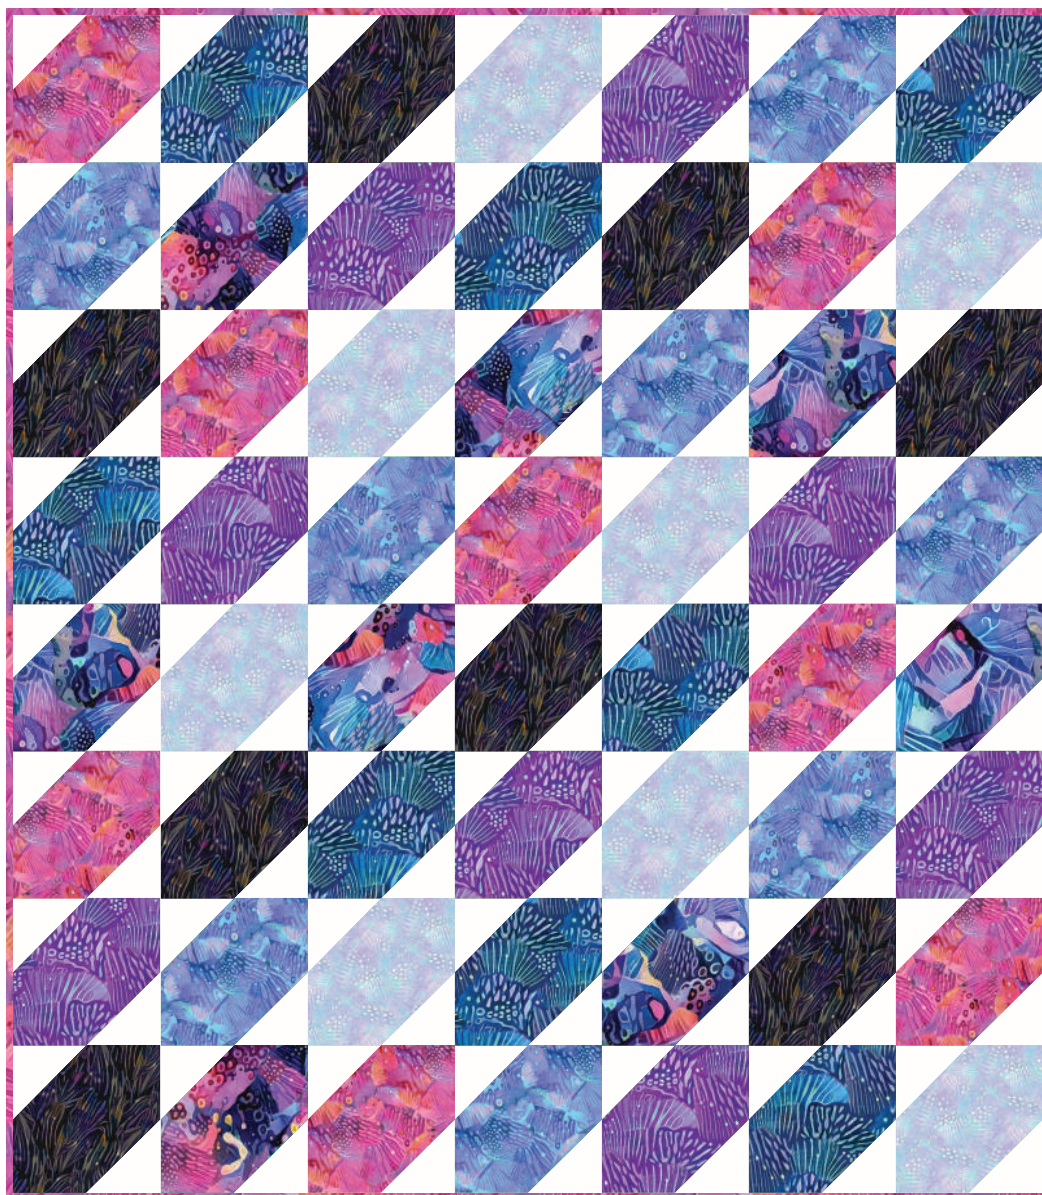

MUSE

FREE PATTERN • 63" x 72" • by Northcott Design Studio

Northcott Canada

101 Courtland Avenue
Vaughan, Ontario L4K 3T5

Northcott USA

1050 Valley Brook Avenue
Lyndhurst, NJ 07071

www.northcott.com

Muse Lap Quilt

Finished Size: 63" x 72"

WOF = width of fabric

All seams are 1/4"

Fabric requirements Green Version or Teal Version	Yards	Cutting Instructions
For Blocks: DP23196-44 DP23197-46 DP23198-23 DP23198-44 DP23197-86 DP23200-99 DP23199-62	5/8 yard each	<ul style="list-style-type: none">• Cut 2 – 9 1/2" x WOF strips• Sub-cut 8 – 9 1/2" x 9 1/2" squares
For Block Corners: 9000-10	2 1/8 yards	<ul style="list-style-type: none">• Cut 14 – 5" x WOF strips• Sub-cut 112 – 5" x 5" squares
For Binding: DP23198-23	2/3 yard	<ul style="list-style-type: none">• Cut 8 – 2 1/2" x WOF strips
For Crosswise Backing: DP23196-44	4 yards	<ul style="list-style-type: none">• Cut in half lengthwise for two 2 yd x WOF pieces. Sew long edges together for a finished backing piece measuring approximately 72" x 84"

BLOCK ASSEMBLY:

Mark each 5" square with a diagonal line from corner to corner on the wrong side of fabric. With right sides of fabric together, place a 5" square on the top left and bottom right corners of a 9 1/2" square. Sew along the marked lines. Trim off the outside corners 1/4" from your stitch line. Press the seams toward the center of the block. Repeat for all 56 blocks, keeping in mind the placement of corner squares on any directional prints.

QUILT TOP ASSEMBLY:

Arrange the blocks in eight rows of seven to your liking or by referring to the quilt image. Sew seven blocks together to complete one row, making sure the corner triangle seams intersect 1/4" from block edges, and pressing seams to one side. Repeat for all eight rows, pressing the seams to the opposite side on every other row. This will make your seams nest when sewing the rows together, creating less bulk at the intersections.

Sew the eight rows together, again making sure the corner triangle seams intersect 1/4" from raw edges, and pressing seams to one side.

Layer quilt top with batting and backing. Quilt and bind as desired.