


Scenes and Ladders

FREE DOWNLOAD PATTERN

48" x 57"

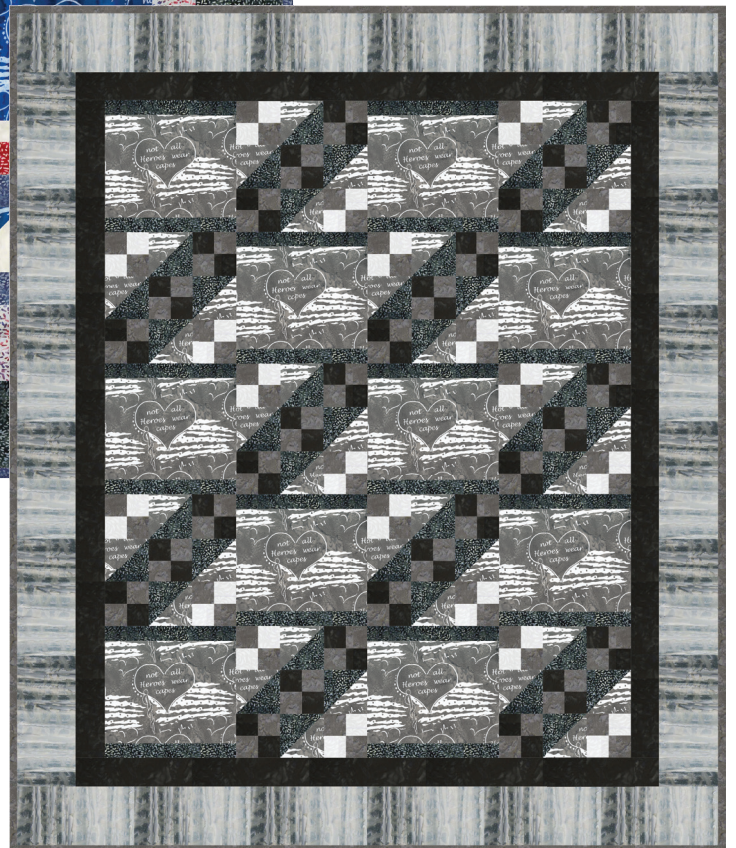

BANYAN
BATIKS
STUDIO

Designed by Banyan Batiks Studio
www.BanyanBatiks.com

SCENES & LADDERS

Finished Size: 48" x 57"

WOF = width of fabric

LOF = length of fabric

All seams are sewn using a 1/4" seam allowance unless otherwise stated.

Diagrams are shown in the Americana option; the other option is done in the same way.

<i>Americana Version</i>	<i>Gray Version</i>	Yardage	Cutting Instructions
Fabric A 80670-45 Main Fabric	Fabric A 80670-92	1 1/4 yds*	<ul style="list-style-type: none"> Fussy Cut 10 – 7 1/2" x 9 1/2" rectangles Cut 20 – 4" squares <p>*Yardage allowance made for fussy cutting</p>
Fabric B 81300-11 Secondary Fabric	Fabric B 81000-639	1/2 yd	<ul style="list-style-type: none"> Cut 1 – 9 1/2" x WOF strip <ul style="list-style-type: none"> Sub cut 20 – 9 1/2" x 1 1/2" strips Cut 1 – 4" x WOF strip <ul style="list-style-type: none"> Sub cut 20 – 4" squares
Fabric C 81000-467 4-Patch Units & Binding	Fabric C 81300-93	1 yd	<ul style="list-style-type: none"> Cut 7 – 2" x WOF strips Cut 6 – 2 1/4" x WOF strips (set aside for binding)
Fabric D 81000-247 4-Patch Units	Fabric D 81201-10	1/4 yd	<ul style="list-style-type: none"> Cut 3 – 2" x WOF strips
Fabric E 81000-1018 4-Patch Units & Inner Border	Fabric E 81000-998	3/4 yd	<ul style="list-style-type: none"> Cut 4 – 2" x WOF strips Cut 5 – 2 1/2" x WOF strips for Inner Border
Fabric F 81000-649 Outer Border	Fabric F 81230-91	5/8 yd	<ul style="list-style-type: none"> Cut 5 – 4 1/2" x WOF strips for Outer Border
Crosswise Backing	Crosswise Backing	3 yds	<ul style="list-style-type: none"> Cut backing piece in half across LOF to get 2 – 1 1/2 yd pieces; sew pieces together along the selvage edges.

Block 1 Assembly:

1. Sew a 9 1/2" x 1 1/2" Fabric B strip to the top & bottom of a 7 1/2" x 9 1/2" Fabric A rectangle as shown in Diagram 1. Repeat to make ten Block A's. See Diagram 2.



Diagram 1



Diagram 2

Block 2 Assembly:

1. Using a ruler, draw a diagonal line from corner to corner on the wrong side of each 4" Fabric B square. Pair each Fabric B square with a Fabric A square and pin to hold in place. Sew a $\frac{1}{4}$ " away from each side of the drawn line. Cut along the drawn line, separating the two sides. Press the seam toward the dark fabric. Repeat for all 20 pairs to yield 40 half square triangles as shown in Diagram 3. Trim all HST's to measure $3\frac{1}{2}$ " square.



Diagram 3

2. Make strip sets using the 2" Fabric C, D & E strips – three C-D sets and four C-E sets. Sub cut the strip sets into 40 - $2" \times 3\frac{1}{2}"$ C-D segments and 60 - $2" \times 3\frac{1}{2}"$ C-E segments as shown in Diagram 4.

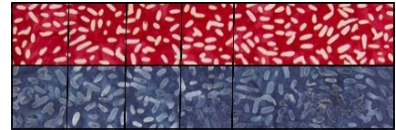


Diagram 4

3. Sew segments together in pairs, flipping one segment opposite the other, to create a $3\frac{1}{2}"$ 4-patch unit as shown in Diagram 5. Repeat to yield 20 C-D 4-patch units and 30 C-E 4-patch units.




Diagram 5

4. Arrange four HST units and five 4-patch units as shown in Diagram 6. Sew units together in each row, then sew rows together to complete Block 2. See Diagram 7.



Diagram 6



Diagram 7

Quilt Top Assembly:

1. Referring to quilt image, arrange blocks in five rows of four, alternating blocks 1 & 2.
2. Sew blocks together to complete rows. Then sew rows together.
3. Join three of the Fabric E Inner Border strips. Measure the length of the quilt top and cut two side border strips to this measurement. Sew to sides of quilt top. Measure the width of the quilt top and trim the remaining two strips to this measurement. Add these to the top & bottom of quilt top.
4. Join the Fabric F Outer Border strips. Measure and add outer borders in the same manner as in Step 3 above.
5. Layer quilt top with batting and backing. Quilt as desired.
6. Join binding strips and prepare binding. Bind quilt using your favorite method.