



# Child's Play with Kate & Nate Crib Ensemble



Lyndhurst Free Pattern



*"Crib Ensemble"* pattern by Patti Carey

Includes Easy-Peasy Crib Quilt (35" x 45") and Doll Quilt (19½" x 23"), Bumper Pads, Crib Sheet (for 27" x 52"), Crib Skirt (approx. 15" deep), Alphabet Wall Border and Window Treatment (Valance and Roll-up Blind).

**Lyndhurst Studio USA**  
1099 Wall St. West, Suite 135  
Lyndhurst, NJ 07071  
201.672.9600

[WWW.LYNDHURSTSTUDIO.COM](http://WWW.LYNDHURSTSTUDIO.COM)

**Lyndhurst Studio Canada**  
640 Rowntree Dairy Road  
Woodbridge, ON Canada L4L 5T8  
905.850.6675

## **Childs Play with Kate and Nate Crib Ensemble**


### **Easy-Peasy Crib Quilt 35" x 45" and Doll Quilt 19½" x 23"**

The matching doll quilt in this set is just the thing for a child anticipating the birth of a new sibling.

<b>Fabric Requirements</b>	<b>Kate</b>	<b>Nate</b>	<b>Yards</b>	<b>Cutting</b>
<b>Fabric A</b> 9-patch	6688-21	6679-43	1½yds	Cut a piece approx. 25½" wide x 35½" high, trimming ¼" beyond edges of pre-printed blocks. From scraps cut a piece approx. 14¾" wide x 18" high, trimming ¼" beyond edges of blocks (for doll quilt).
<b>Fabric B</b> green mushrooms	6686-74	6686-74	¼yd	Cut 4 strips 1¼" x width of fabric (wof) for crib quilt and 2 strips 7⁄8" x wof for doll quilt.
<b>Fabric C</b> small print	6684-21	6683-10	⅔yd	Cut 4 strips 4½" x wof for crib quilt and 2 strips 2½" x wof for doll quilt.
<b>Fabric D</b> small stripe	6685-21	6685-43	½yd	Cut into 2" wide bias strips and join end-to-end for binding.
<b>Fabric E</b> backing	F6692-21	F6684-10	2½yds	

#### **Instructions:**

1. Cut 2 of the 1½" Fabric B strips the width of the trimmed large piece of Fabric A. Sew to top and bottom edges, pressing seam toward Fabric B.
2. Cut the remaining (2) 1½" Fabric B pieces to the length of the piece from step 1 including border. Also cut 2 of the 4½" Fabric C strips the same length. Sew a Fabric B strip to each Fabric C strip, pressing seam toward Fabric B. Sew these border units to sides of quilt, pressing seam toward Fabric B.
3. Cut the remaining 4½" Fabric C strips to the width of the quilt including borders. Sew to top and bottom edges of quilt, keeping direction of fabric correctly aligned. Press seam toward Fabric B.
4. Repeat steps 1-4 with the remaining pieces of Fabrics A, B & C to make the doll quilt top.
5. From backing fabric, cut a piece large enough for each quilt.
6. Using batting of your choice, layer the backing, batting and quilt top. Baste and quilt as desired. Trim edges even with quilt top(s).
7. Sew the prepared Fabric D bias binding to the edges, turn and stitch in place.

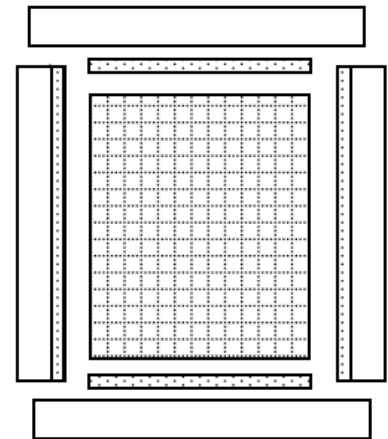


#### **Bumper Pads**

<b>Fabric Requirements</b>	<b>Kate</b>	<b>Nate</b>	<b>Yards</b>	<b>Cutting</b>
<b>Fabric A</b> number patch	F6691-21	F6682-43	2¾yds	Cut 8 strips approx 12" high, trimming ¼" above a row of pre-printed blocks. Trim each strip to 10" high, trimming off bottom edge.
<b>Fabric B</b>	F6684-35	F6685-43		Cut 11 strips 2" x wof.
9" x 158" bumper pad batting				

### Instructions:

1. To make flange for top edge of bumper pad, sew 4 strips of Fabric B end-to-end and press in half wrong sides together.
2. Sew Fabric A pieces together end-to-end in 2 sets of 4. Trim to 159".
3. Baste the flange to the top edge of one Fabric A set with a  $\frac{3}{8}$ " seam.
4. With right sides together, pin the flanged Fabric A set to the remaining set. Using a  $\frac{1}{2}$ " seam, sew together along top edge, one end, and bottom edge, keeping remaining end open.
5. To turn right side out, reach in through tube to grab stitched end. With same hand, grab one end of bumper pad batting. Working slowly (or with another set of hands) turn the tube right side out, easing the tube over the padding.
6. Press remaining end under  $\frac{1}{2}$ " and edge-stitch the opening closed.
7. To make the ties, press the 7 remaining Fabric B strips in half lengthwise wrong sides together; fold each raw edge in to the center fold and press again. Stitch close to double folded edge. Cut each strip in half to make (14) 20" pieces, then fold each piece in half.
8. Sew a tie to each corner along fold in tie. From one end, measure and pin a tie to top and bottom edges at the following points: 27", 26", 26", 27", 26". Stitch from top to bottom at these points through all layers, securing ties.

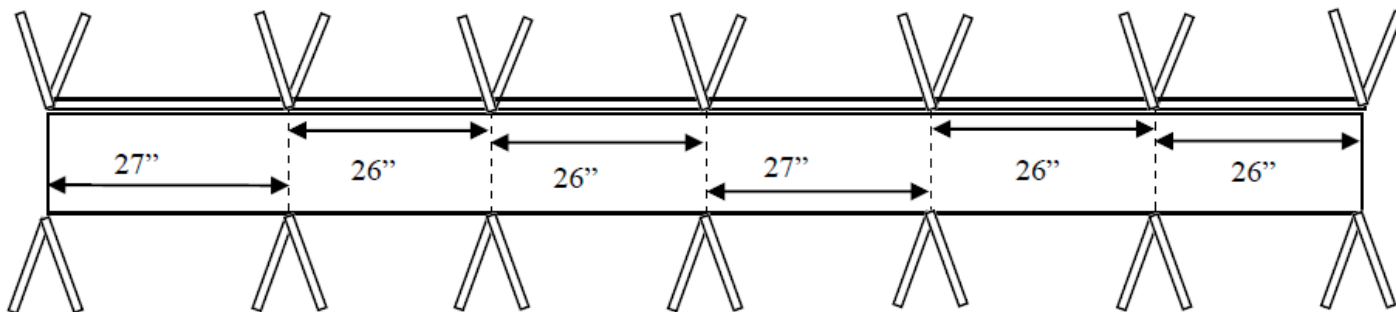


### Crib Sheet (for 27" x 52" x 6" mattress)

Fabric Requirements	Kate	Nate	Yards	Cutting
Fabric A allover	F6690-68	F6681-68	2yds	Trim to 68"
60" of $\frac{1}{4}$ " elastic				

### Instructions:

1. Press under  $\frac{1}{4}$ " on short ends of fabric.
2. Fold each corner diagonally, aligning pressed edges with selvedge. Measure 8" along selvedge from corner, and stitch. Trim excess.
3. Press edges under  $\frac{1}{2}$ ". To form elastic casing, measure 10" from corner on each long side. Sew close to edge, across short end and 10" down next side. Repeat for both ends.
4. Cut (2) 30" pieces of elastic; insert into casing, stitching ends to secure. Sew close to edge on remainder of each side.

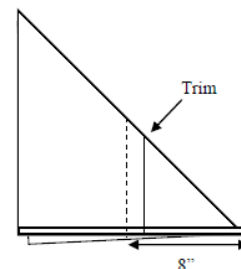


## Crib Skirt (approx. 15" deep)

Fabric Requirements	Kate	Nate	Yards	Cutting
<b>Fabric A</b> border stripe	6677-21	6676-43	3½yds	From each selvedge, cut a piece approx. 15½" wide, trimming ¼" beyond the mushroom/star stripe. Sub-cut each piece into an 80" piece and a 41" piece. Reserve balance of stripe for roll-up blind.
<b>Fabric B</b> brown print	6693-35	6684-36	1½yds	Trim to 27" x 52"

### Instructions:

1. Press sides of each 15½" Fabric A piece under ½" then ½" again and stitch close to fold. Hem the bottom of each piece in the same manner.
2. Fold each 41" piece in half to find mid-point and, with right sides together, pin midpoint to the midpoint of the short sides of the Fabric B piece. Pin ends of skirt ½" from each end of Fabric B piece. Make a box pleat at the midpoint by folding excess fabric under at the midpoint, and secure with pins. Sew skirt to Fabric B piece with a ½" seam.
3. Fold each 80" skirt piece in ¼'s and mark with pins. On Fabric B piece, measure 13½" from each end and mark with a pin. Also mark midpoint of each side. With right sides together, pin the skirt to the Fabric B piece at midpoint, and pin ends ½" from each end of B. Align remaining pins at the 13½" marks and make box pleats as above. Sew skirt to B with a ½" seam.

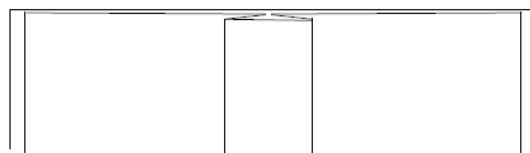

## Alphabet Wall Border (each panel yields up to 12½ft of border)

Fabric Requirements	Kate	Nate	Yards	Cutting
<b>Fabric A</b> alphabet panel	6673-21	6672-43	⅔yd	Cut panel into rows approx. 4¾" high, centering a row of blocks in each strip.
<b>Fabric B</b> small stripe	6685-21	6685-43	½yd	Cut 8 strips 2" x wof and join end-to-end.

### Instructions:

1. Trim the left end of each strip ¼" beyond the left edge of the garland, and the right end of each strip ¼" to the right of the left edge of the garland.
2. Sew the strips together in alphabetical order, including the top section of the panel if you wish. Press seams open.
3. Press the Fabric B pieced strip in half wrong sides together.
4. Sew to the back of the alphabet border along top and bottom edges with a ¼" seam, aligning raw edges.
5. Turn "binding" to the front, covering previous stitching, and machine-stitch close to fold.
6. Spray with sizing, and press to stiffen before hanging.

# Fabric Book

Fabric Requirements	Kate	Nate	Yards
Fabric A panel: Alphabet or Firsts/Faves	#(F)6673-21/ #6675-21	#(F)6672-43/ #6674-43	1 panel (3/8yd) + (2) 6" square scraps for Firsts/Faves panel only
Peltex non-fusible	#P70	#P70	

## Instructions:

1. Cut panel into blocks of equal size, keeping blocks as large as possible. For the alphabet panel, blocks will be approx. 4 3/4" high x 4 7/8" wide. For the Firsts & Favorites panel, blocks will be approx. 5 3/4" high x 4 7/8" wide. Include the 2 car blocks in the alphabet panel and trim the (2) 6" scraps to size for the Firsts/ Favorites panel. Cut Peltex pieces 5/8" smaller than the blocks, cutting 14 pieces for the alphabet blocks and 8 pieces for the Firsts & Favorites blocks.

2. Determine the order in which you want the blocks and number each block – for the alphabet panel, there are 28 blocks including the 2 cars. For the First/Faves, there are 16 blocks including the 2 additional pieces. Number the pieces in consecutive order.


### 3. Alphabet book:

a) Sew a #28 block to a #1 block as shown; press seam open.

b) Lay out #27 & #2 blocks right side down as shown; press inside edge under 1/4"

c) Lay the #27 & #2 blocks right side together on the #28/#1 unit, and sew 1/4" from edge on all 4 sides. Turn right side out through opening in center, insert a Peltex piece into each page and zigzag opening closed through all layers.

d) Repeat with the remaining pages as shown. Stack the pages in order; hand-sew together through "spine".

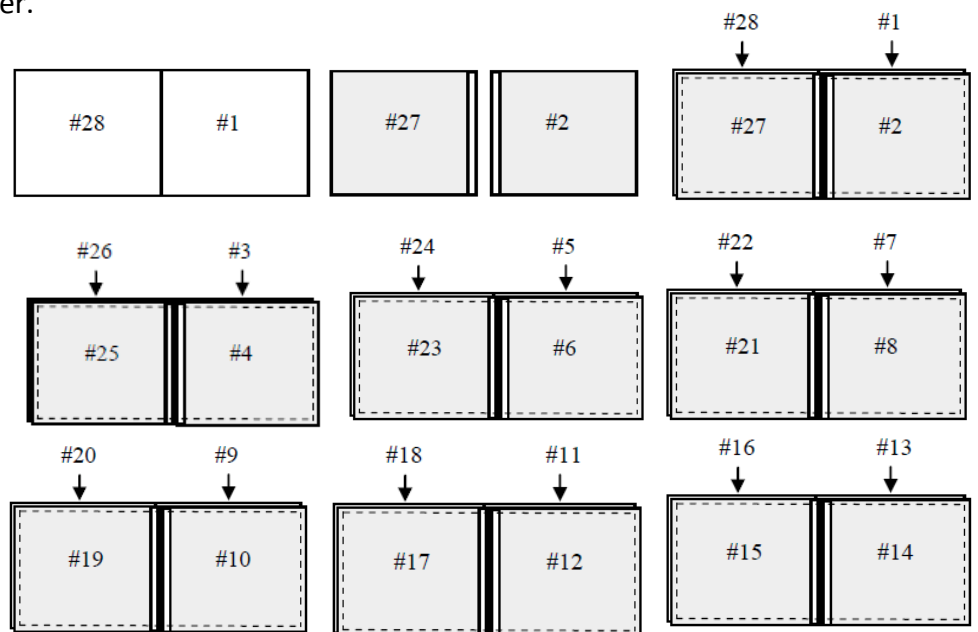


### 4. Firsts & Favorites book:

a) Sew a #16 block to a #1 block as shown; press seam open.

b) Lay out #15 & #2 blocks right side down as shown; press inside edge under 1/4".

c) Lay the #15 & #2 blocks right side together on the #16/#1 unit, and sew 1/4" from edge on all 4 sides. Turn right side out through opening in center, insert a Peltex piece into each page and zigzag opening closed through all layers.

d) Repeat with the remaining pages as shown. Stack the pages in order; hand-sew together through "spine".

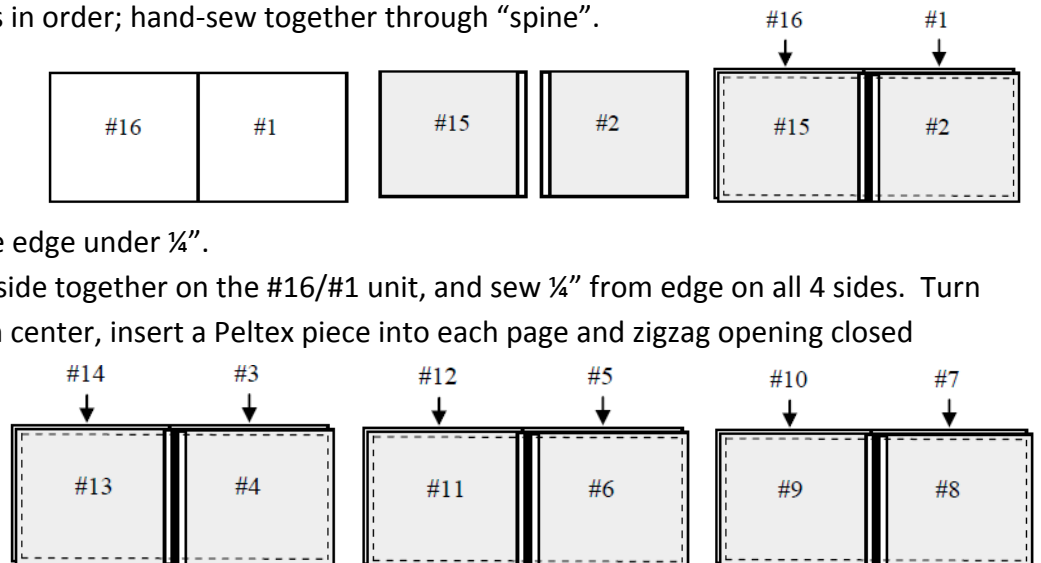

## Window Treatment – Valance and Roll-up Blind (for a window up to 40” wide x 48” high)

Fabric Requirements	Kate	Nate	Yards
<b>Fabric A</b> border stripe	6677-21	6676-43	1¾yds or 24” wider than the inside measurement of your window (or 1yd if you join strips cut from both selvages)
<b>Fabric B</b> large print	6687-21	6678-43	1½yds or 6” longer than inside measurement (length) of your window
<b>Fabric C</b> brown print	6693-35	6684-36	1½yds or 6” longer than inside measurement (length) of your window
Balance of stripe from crib skirt			Cut 4 matching lengthwise strips 2½” wide x 60” long.
Optional: black-out fabric			1½yds or 6” longer than length of window
Building supplies for valance plus 1”x2”x44” piece of wood & maximum 48” long café rod or strip of wood			
Lofty batting to cover valance			

### Instructions:

**Valance: 1.** Measure width of window including frame. Cut a piece of wood (or similar material) 6-8” longer than this measurement, and desired height of valance (6-10”) – this is the front piece. Also cut 2 pieces the height of the valance (minus the thickness of the wood) x the distance that you want the valance to extend from the wall (4-6”) (these are the sides), and cut 1 piece the length of the valance x distance from the wall (this is the top piece).

**2.** Attach the sides to the back of the front piece using L-brackets, aligning the pieces at bottom edge.

**3.** Attach the top to the back of the front piece using L-brackets, putting it on top of the side pieces, and attaching it to the sides with L-brackets as well.

**4.** Join Fabric A stripe pieces if required. Measure length valance from back of one side, across front to back of other side. Cut a piece of stripe 6” longer than this measurement. (eg. If valance is 44” wide and 4” deep, cut stripe 58”.) Measure height of valance from bottom edge of front to back edge of top. Trim stripe 7” wider than this measurement. (eg. If valance is 8” high and 4” deep, cut stripe 19” high.)

**5.** Lay valance fabric right side down. Cut a piece of batting slightly smaller than fabric and lay on top of fabric. Position valance face down on fabric. Wrap fabric/batting around valance to back and staple in place with a staple gun. Tuck excess fabric in neatly on top and wrap to inside; staple into place. Wrap bottom edge to inside and staple.

**6.** Attach “eyes” to inside sides, and attach hooks to wall. Hook eyes over hooks to attach valance to wall.

**Roll-up Blind: 7.** Determine finished length and width of blind, adding 1” to width and 6” to length. Cut Fabric B, C and optional black-out fabric this size.

**8.** Pin B and C right sides together, adding black-out fabric to bottom if using. Sew down one side, across bottom and up other side with a ½” seam, leaving top edge open. Trim off seam allowance at corners and turn right side out. Press.

**9.** Press bottom edge under 2” to back and stitch close to edge to make a casing for café rod.

**10.** Fold each 60” stripe strip right sides together and sew along long edge and across bottom with a ¼” seam to make a tie 60” x 1”. Turn right side out and press. Attach to top edge of blind approx. 12” from each side, sewing one to the front and one to the back at each position.

**11.** Staple blind to 1”x2” piece of wood and attach wood strip to window frame.